


SN-IRC 13/66ASVD(III)


1080P Hybrid Analogue Bullet



Key features

- ☒ 1/2.9" Sony Progressive Scan CMOS
- ☒ 3.6mm/6mm/8mm/12mm Optional
- ☒ Full HD 1080P
- ☒ Video Transmission 300m
- ☒ IR Range 15m
- ☒ 2DDNR,dWDR,ICR
- ☒ Support AHD/TVI/CVI/CVBS Hybrid Output
- ☒ IP66

Dimension

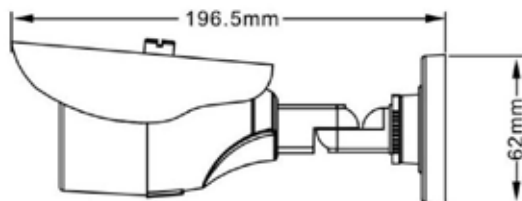

Accessories



SN-BK319

Specifications

CAMERA	
Image Sensor	1/2.9" Sony CMOS
Signal System	PAL/NTSC
Min. illumination	Color 0.0Lux(AGC ON);IR ON 0 Lux
S/N Ratio	≥ 50dB
Day & Night	ICR
Shutter Speed	PAL:1/501/50000 NTSC:1/60/60000
Wide Dynamic Range	dWDR
Digital Noise Reduction	2D
Lens	3.6mm/6mm/8mm/12mm Optional
FOV	85°
IR LED	18pcs
IR Wavelength	850nm
IR Range	15m
OSD Joystick	Optional
Up the Coax	Support
IMAGE	
Effective Resolution	1920x1080
Frame	PAL:25fps ,NTSC:30fps
Mirror	N/A
Defog	N/A
HLC	N/A
Privacy Masking	N/A
Motion Detection	N/A
VIDEO OUTPUT	
Max Distance	75-5 300m
Video Output	AHD/TVI/CVI/CVBS
GENERAL	
Power Supply	DC12V±10%
Power Consumption	3.5W(Max)
Operating Temperature	-10°C ~ 55°C (14°F ~ 131°F)
Operating Humidity	0% - 85% RH
Ingress Protection	IP66
Approvals	CE / FCC
Material	Aluminium Alloy
Product Dimensions	Φ196.5x 62mm
Product Weight	360g