


SN-IRC 13/66BGDN(III)


1080P Hybrid Analogue Bullet



Key features

- ☒ 1/2.9" Sony Progressive Scan CMOS
- ☒ 2.8-12mm/12mm/16mm Optional
- ☒ Motorized Lens Optional
- ☒ Full HD1080P
- ☒ Video Transmission 300m
- ☒ IR Range 35-40m
- ☒ 2D DNR, dWDR, ICR
- ☒ Support AHD/TVI/CVI/CVBS Hybrid Output
- ☒ IP66

Dimension

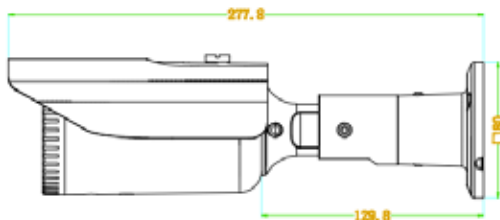

Accessories

N/A

Specifications

CAMERA		
Image Sensor	1/2.9" Sony CMOS	
Signal System	PAL/NTSC	
Min. illumination	Color 0.0Lux (AGC ON); IR ON 0 Lux	
S/N Ratio	≥ 50dB	
Day & Night	ICR	
Shutter Speed	PAL: 1/50-1/50000, NTSC: 1/60-1/60000	
Wide Dynamic Range	dWDR	
Digital Noise Reduction	2D	
Lens	2.8-12mm/12mm/16mm Optional	2.8-12mm Motorized Lens
FOV	90° ~35°	
IR LED	30pcs	
IR Wavelength	850nm	
IR Range	35-40m	
OSD Joystick	Optional	
Up the Coax	Support	
IMAGE		
Effective Resolution	1920x1080	
Frame	PAL: 25fps, NTSC: 30fps	
Mirror	N/A	
Defog	N/A	
HLC	N/A	
Privacy Masking	N/A	
Motion Detection	N/A	
VIDEO OUTPUT		
Max Distance	75-5 300m	
Video Output	AHD/TVI/CVI/CVBS	
GENERAL		
Power Supply	DC12V±10%	
Power Consumption	4W(Max)	
Operating Temperature	-10°C ~ 55°C (14°F ~ 131°F)	
Operating Humidity	0% - 85% RH	
Ingress Protection	IP66	
Approvals	CE / FCC	
Material	Aluminium Alloy	
Product Dimensions	277x 80mm	
Product Weight	800g	