MODEL: FR 1200

FR 1200

Outdoor Slave Fingerprint Reader

Small Form Factor:

Sealed Enclsoure with slim and attractive design are ideal for indoor and outdoor mounting.

Communication:

FR1200 can be connected to RS485 port of any ZK's inBio Panel or Standalone reader controllers.

Easy Operation:

Once user places their finger on FR1200 its fingerprint is matched by either ZK's standalone reader control - ler (master reader) or ZK's inBio Panel. It also provides Visual indication for acceptance/rejection of the fingeprint of the users.

Waterproof enclosure:

FR1200 is an IP65 rated wateroof reader that can be used for many outdoor applications. The cables and connectors are epoxy sealed at the back of the reader.

Options:

FR1200 is an IP65 rated wateroof reader that can be used for many outdoor applications.

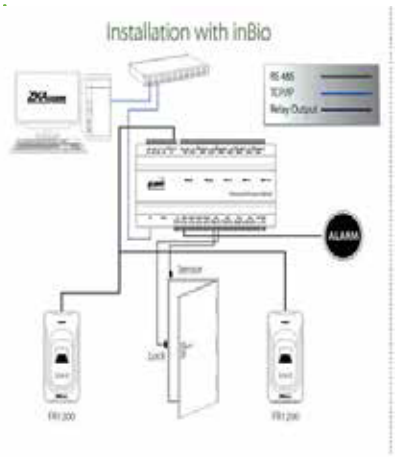

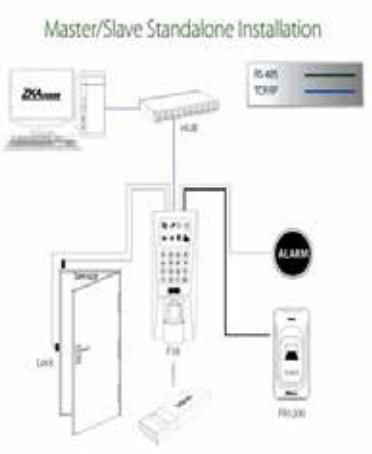

Specifications

Communication
RS485

Power
12V DC, 1A

Environment
Operating Temperature: 32°F to 113°F (0° to 45°C)
Operating Humidity: 20% to 80%

Optional Function
Mifare Card

Dimensions
Length: 3in (7.62cm)
Width: 1.6in (4cm)
Depth: 1.1in (2.8cm)
Weight: 0.27lbs (0.12kg)

Waterproof Enclosure
IP65 Rated

Part Numbers

FR1200
FR1200-ID with ID card reader
FR1200-M with Mifare card reader

What's in the Box

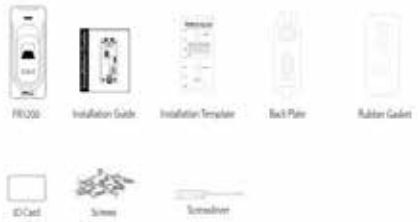

CE FC RoHS

Design and Specifications subject to change without notice

VTV Electronic

VTV ELECTRONIC SDN BHD & VTV SECURITY SERVICE CENTRE
Lot 7-1, 1st Floor, Block A, Lintas Square, Jalan Lintas, 88300 Kota Kinabalu, Sabah. Tel : +088-233-466, HP : 012-813-3189

V SECURITY SYSTEM
KM 11 1/4, Jalan Putatan, Kota Kinabalu, Sabah. (sebelah Kiong Li Timber) Tel : +088-773-080, HP : 012-885-0308

VSR SECURITY SYSTEM
Block A, No.11, Tropical Umbrella Industrial, Jalan Arsat 87012 Labuan W.P. Labuan Tel : +087-443-189, HP : 012-878-3189